
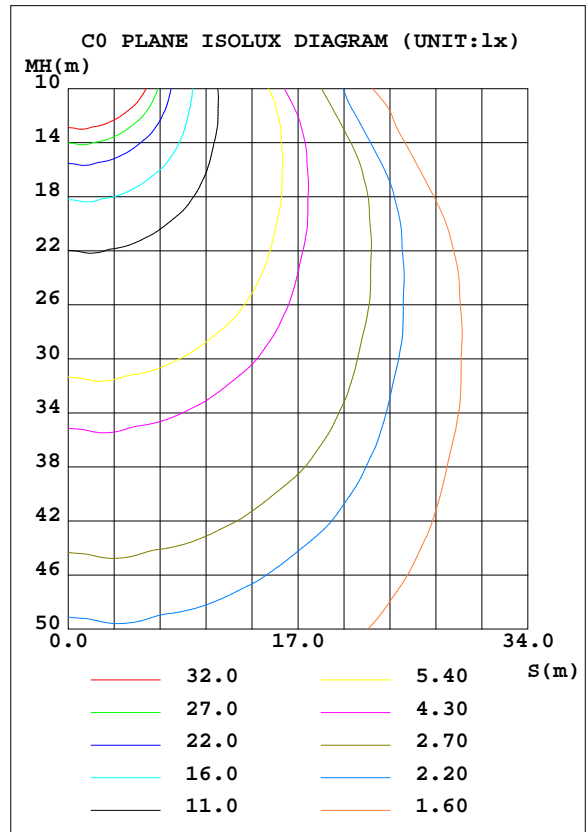


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:19361x1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 137.21 lm/W			
MODEL		I _{max} (cd)	5536	S/MH(C0/180)	1.33
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.35
RATED VOLTAGE(V)		TOTAL FLUX(lm)	19361	η UP, DN(C0-180)	4.0,45.4
NOMINAL FLUX(lm)	19361	CIE CLASS	DIRECT	η UP, DN(C180-360)	4.2,46.4
LAMPS INSIDE	1	η up(%)	8.1	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)		η down(%)	91.9	CIBSE SHR MAX	1.50

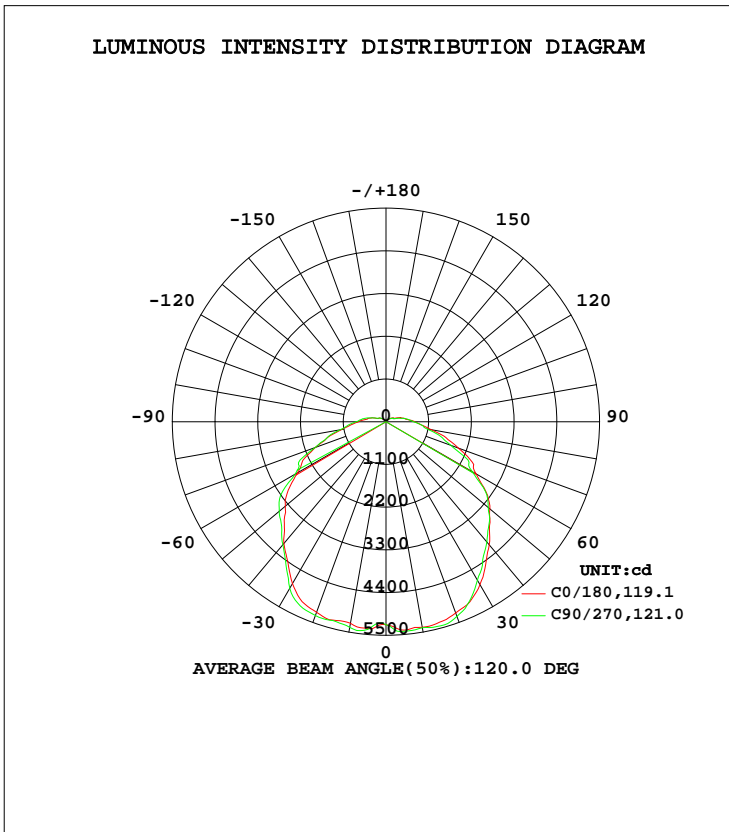

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5373	5378	5388	5412	5268	5268	5378	5416	0- 10	512.9	512.9	2.65,2.65
20	5241	5374	5336	5417	5224	5351	5311	5346	10- 20	1520	2033	10.5,10.5
30	4840	4846	4711	4794	4814	4961	4956	4950	20- 30	2364	4397	22.7,22.7
40	4134	4061	4040	4099	4090	4096	4133	4194	30- 40	2787	7184	37.1,37.1
50	3495	3534	3440	3328	3388	3521	3591	3478	40- 50	2915	10099	52.2,52.2
60	2675	2581	2569	2563	2632	2633	2706	2691	50- 60	2757	12856	66.4,66.4
70	1990	1862	1777	1871	1942	1931	1946	2010	60- 70	2301	15157	78.3,78.3
80	1182	1092	1071	1110	1156	1156	1202	1221	70- 80	1623	16780	86.7,86.7
90	741.4	723.7	714.7	685.8	711.0	762.5	765.9	751.8	80- 90	1005	17785	91.9,91.9
100	495.9	481.1	486.7	460.2	482.4	491.9	534.8	511.7	90-100	665.4	18450	95.3,95.3
110	295.5	256.6	240.8	252.8	264.4	267.2	282.8	300.6	100-110	410.1	18860	97.4,97.4
120	205.1	195.9	191.1	192.7	198.9	196.5	196.6	199.1	110-120	219.7	19080	98.5,98.5
130	121.1	130.6	130.2	116.1	116.7	129.3	131.8	125.0	120-130	142.2	19222	99.3,99.3
140	75.12	72.13	71.17	69.05	71.24	72.82	76.09	76.39	130-140	79.21	19301	99.7,99.7
150	36.04	35.30	34.49	35.84	33.42	34.73	35.48	34.90	140-150	33.01	19334	99.9,99.9
160	31.06	31.18	31.47	31.65	30.27	30.09	30.13	29.90	150-160	14.89	19349	99.9,99.9
170	31.66	31.84	31.94	32.29	31.72	31.56	31.44	31.36	160-170	8.776	19358	100,100
180	32.94	33.01	33.04	33.13	33.18	33.15	33.18	33.19	170-180	3.088	19361	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 8639.5 lm

%lum = 44.6%
%lamp = 44.6%

Conical surface Flux(120deg): 12856 lm


%lum = 66.4%
%lamp = 66.4%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:9.660m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:1936lx1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:

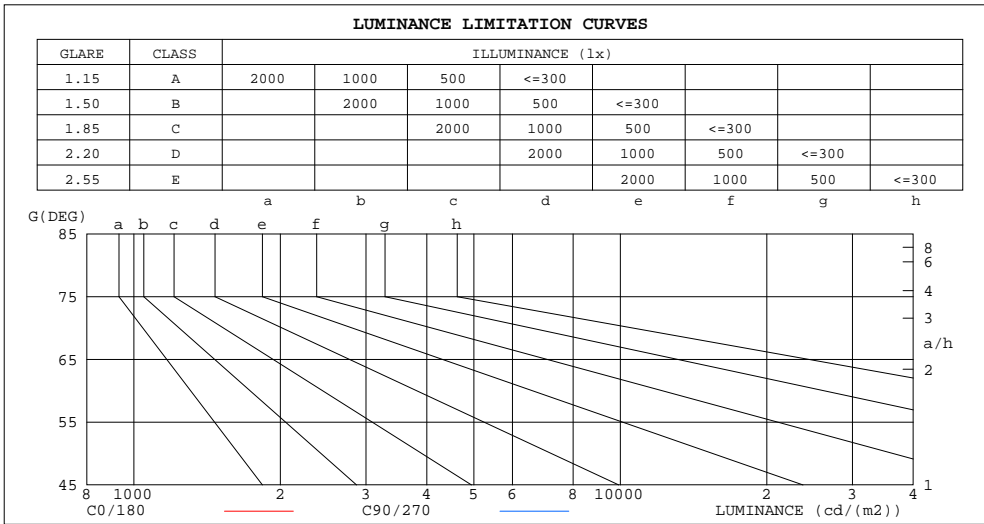

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	279010	274071
80	182304	162355
75	166035	148296
70	155837	136700
65	155158	145020
60	143276	135190
55	146937	143504
50	145606	140834
45	142967	139581


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:1936lx1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.07	1.07	1.07	1.00	1.00	1.00	.95	.95	.95	.92
1.0	.00	.95	.90	.97	.92	.88	.91	.87	.84	.85	.82	.80	.80	.78	.76	.73
2.0	.86	.79	.72	.83	.77	.71	.78	.73	.68	.74	.69	.65	.70	.66	.62	.60
3.0	.75	.66	.59	.73	.65	.58	.69	.62	.56	.65	.59	.54	.61	.56	.52	.50
4.0	.66	.57	.50	.64	.56	.49	.61	.53	.48	.57	.51	.46	.54	.49	.45	.42
5.0	.59	.50	.43	.57	.49	.42	.54	.47	.41	.51	.45	.40	.49	.43	.39	.36
6.0	.53	.44	.37	.52	.43	.37	.49	.41	.36	.46	.40	.35	.44	.38	.34	.32
7.0	.48	.39	.33	.47	.38	.32	.44	.37	.31	.42	.36	.31	.40	.34	.30	.28
8.0	.44	.35	.29	.43	.34	.29	.41	.33	.28	.39	.32	.27	.37	.31	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.37	.30	.25	.36	.29	.25	.34	.28	.24	.22
10.0	.37	.29	.24	.36	.28	.23	.34	.28	.23	.33	.27	.22	.32	.26	.22	.20

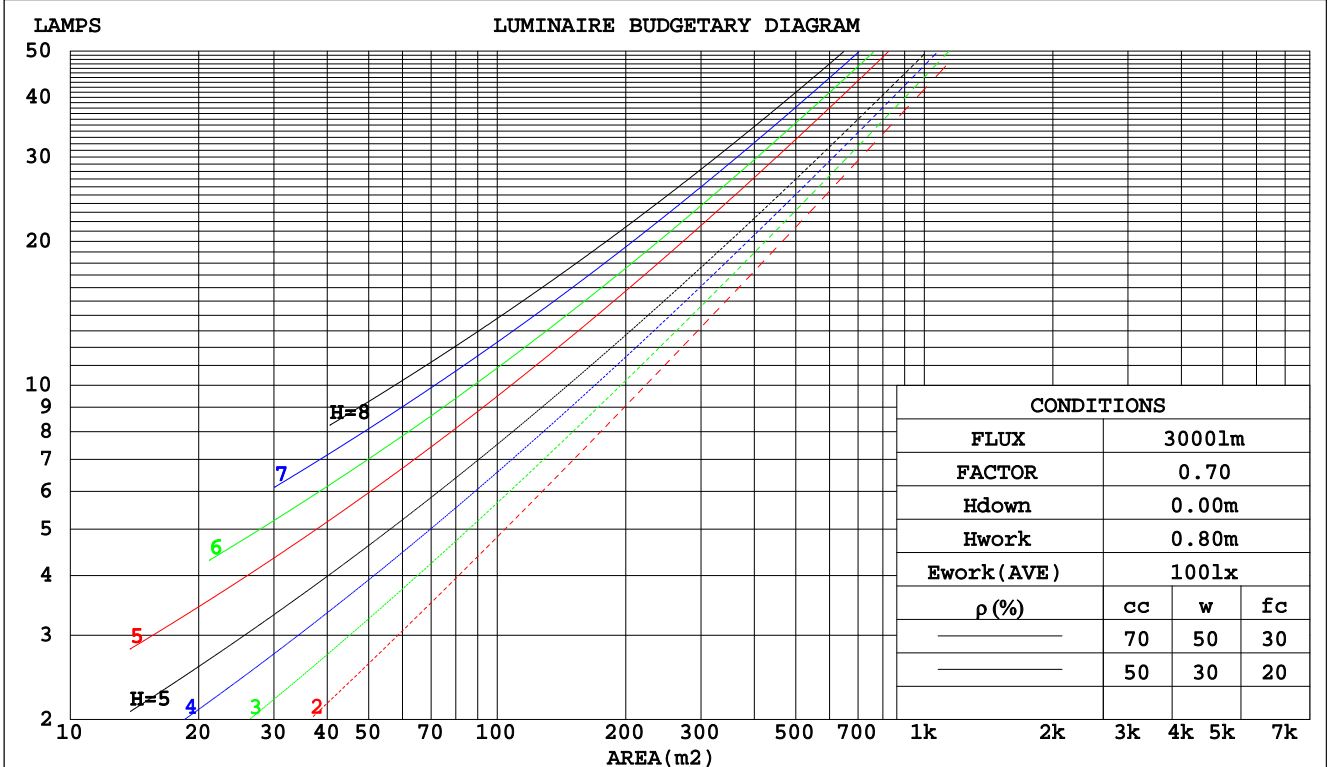

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 9.660m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:1936lx1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.353	.201	.064	.343	.196	.062	.325	.187	.060	.309	.178	.057	.293	.170	.055	
2.0	.315	.173	.053	.307	.169	.052	.291	.162	.050	.276	.155	.048	.262	.148	.047	
3.0	.285	.152	.045	.277	.148	.045	.263	.142	.043	.249	.137	.042	.237	.131	.041	
4.0	.259	.135	.040	.252	.132	.039	.239	.127	.038	.227	.122	.037	.216	.117	.036	
5.0	.237	.121	.035	.231	.119	.035	.219	.114	.034	.208	.110	.033	.198	.106	.032	
6.0	.218	.110	.031	.213	.108	.031	.202	.104	.030	.192	.100	.029	.183	.096	.029	
7.0	.202	.100	.028	.197	.098	.028	.188	.095	.027	.179	.092	.027	.170	.088	.026	
8.0	.188	.092	.026	.184	.090	.026	.175	.087	.025	.167	.084	.024	.159	.082	.024	
9.0	.176	.085	.024	.172	.084	.023	.164	.081	.023	.156	.078	.022	.149	.076	.022	
10.0	.165	.079	.022	.161	.078	.022	.154	.075	.021	.147	.073	.021	.140	.071	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.253	.253	.253	.216	.216	.216	.147	.147	.147	.085	.085	.085	.027	.027	.027	
1.0	.246	.218	.194	.210	.187	.167	.144	.129	.115	.083	.075	.067	.027	.024	.022	
2.0	.238	.195	.158	.204	.168	.137	.140	.116	.095	.081	.067	.056	.026	.022	.018	
3.0	.231	.178	.136	.198	.153	.117	.136	.106	.082	.078	.062	.049	.025	.020	.016	
4.0	.223	.165	.120	.191	.142	.105	.132	.099	.074	.076	.058	.044	.024	.019	.014	
5.0	.215	.155	.110	.185	.134	.096	.127	.093	.068	.074	.055	.040	.024	.018	.013	
6.0	.208	.146	.102	.179	.127	.089	.123	.089	.063	.072	.052	.038	.023	.017	.012	
7.0	.201	.140	.097	.173	.121	.084	.119	.085	.060	.069	.050	.036	.022	.016	.012	
8.0	.194	.134	.093	.167	.116	.081	.116	.082	.057	.067	.048	.034	.022	.016	.011	
9.0	.188	.129	.089	.162	.112	.078	.112	.079	.055	.065	.047	.033	.021	.015	.011	
10.0	.182	.125	.087	.157	.108	.076	.109	.076	.054	.064	.045	.032	.021	.015	.011	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:19361x1 lm										
NAME: 花瓶灯					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.11*0.11*3.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	29.6	31.1	30.0	31.4	31.8	29.4	30.8	29.7	31.2	31.5
3H	31.6	32.9	32.0	33.3	33.7	31.2	32.6	31.6	33.0	33.4
4H	32.5	33.8	32.9	34.2	34.6	32.1	33.4	32.5	33.8	34.2
6H	33.3	34.6	33.8	35.0	35.4	32.9	34.1	33.3	34.5	35.0
8H	33.8	34.9	34.2	35.4	35.8	33.3	34.5	33.8	34.9	35.4
12H	34.3	35.4	34.7	35.8	36.3	33.8	35.0	34.3	35.4	35.9
4H 2H	30.3	31.5	30.7	31.9	32.4	30.1	31.4	30.5	31.8	32.2
3H	32.4	33.5	32.9	34.0	34.4	32.1	33.3	32.6	33.7	34.2
4H	33.5	34.5	34.0	35.0	35.5	33.2	34.2	33.7	34.7	35.2
6H	34.5	35.4	35.0	35.9	36.4	34.1	35.1	34.7	35.6	36.1
8H	35.0	35.9	35.5	36.4	36.9	34.6	35.5	35.2	36.0	36.6
12H	35.6	36.4	36.2	36.9	37.5	35.3	36.1	35.8	36.6	37.2
8H 4H	33.8	34.7	34.3	35.2	35.7	33.6	34.4	34.1	34.9	35.5
6H	35.0	35.8	35.6	36.3	36.9	34.8	35.5	35.3	36.0	36.6
8H	35.7	36.4	36.3	36.9	37.6	35.4	36.1	36.0	36.7	37.3
12H	36.6	37.1	37.2	37.7	38.4	36.3	36.9	36.9	37.4	38.1
12H 4H	33.9	34.7	34.4	35.2	35.8	33.6	34.4	34.2	34.9	35.5
6H	35.2	35.8	35.8	36.4	37.0	34.9	35.6	35.5	36.1	36.8
8H	35.9	36.5	36.5	37.1	37.7	35.7	36.3	36.3	36.8	37.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 19361 lm Total Lamp Luminous Flux.(8log(F/F0) = 10.3)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:1936lx1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	41	34	52	41	34	51	40	33	27
0.80	62	50	42	61	50	42	59	49	42	34
1.00	70	58	50	69	58	50	66	59	49	42
1.25	77	66	58	76	65	57	72	63	56	48
1.50	82	71	63	80	70	63	77	68	61	52
2.00	89	80	72	87	78	71	83	75	69	60
2.50	94	85	77	91	83	76	86	79	74	64
3.00	97	89	82	94	87	81	89	83	78	67
4.00	102	95	89	98	92	87	93	88	84	72
5.00	104	98	93	101	96	91	95	91	87	75
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:1936lx1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:

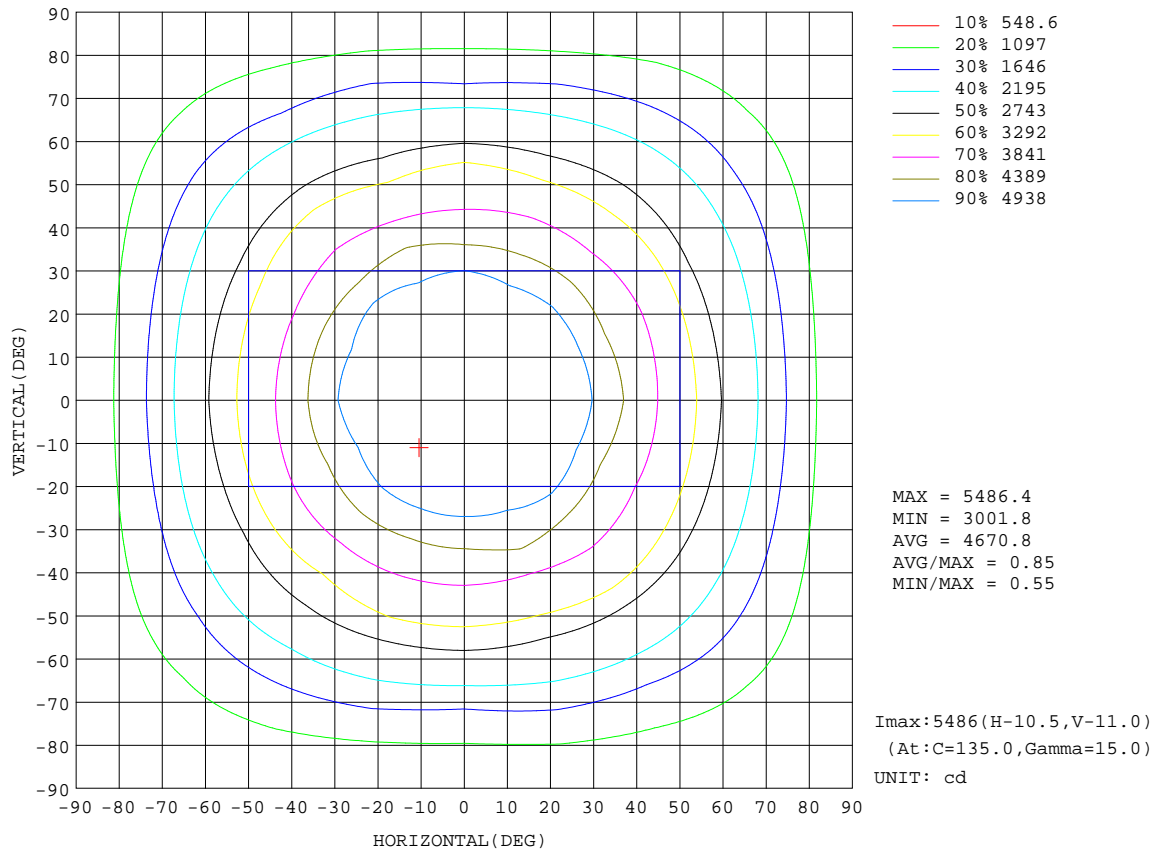


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:1936lx1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:

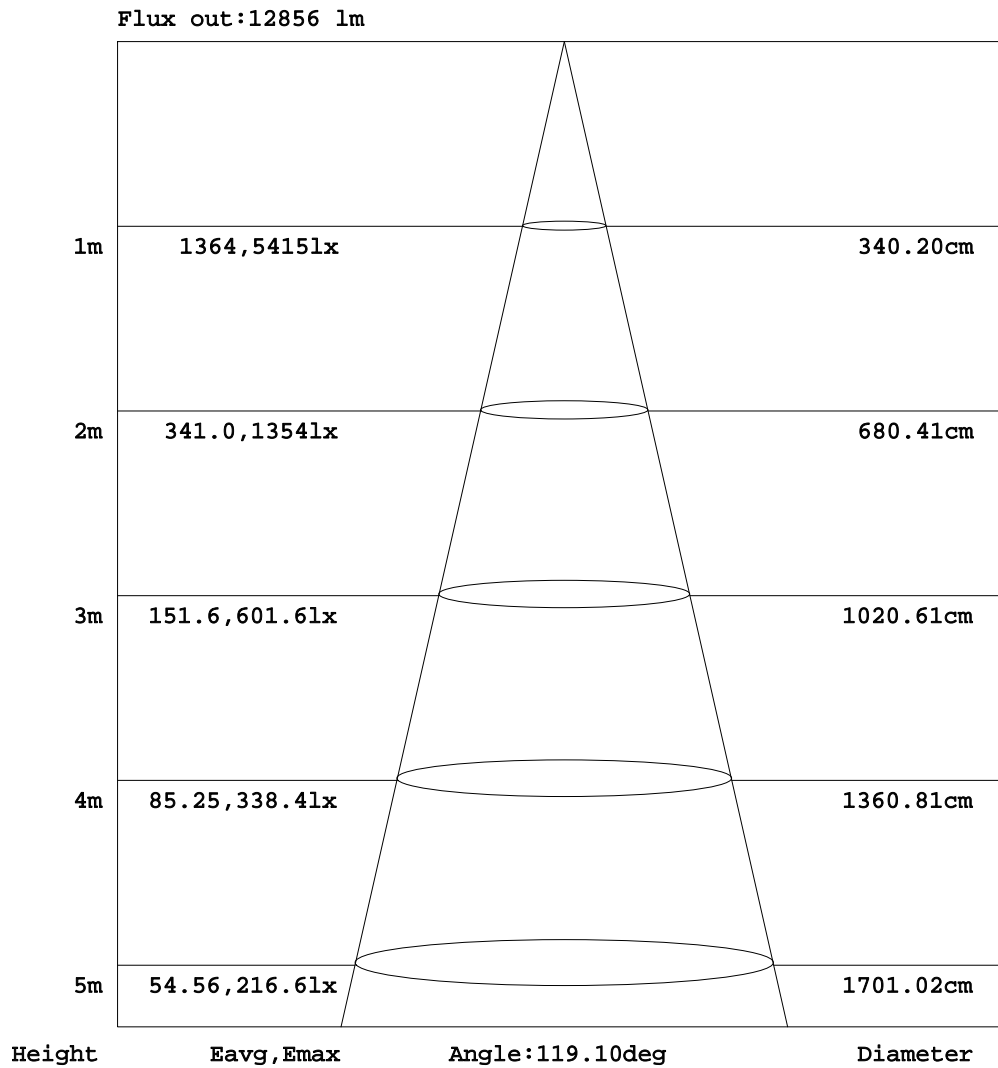


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:1936lx1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:

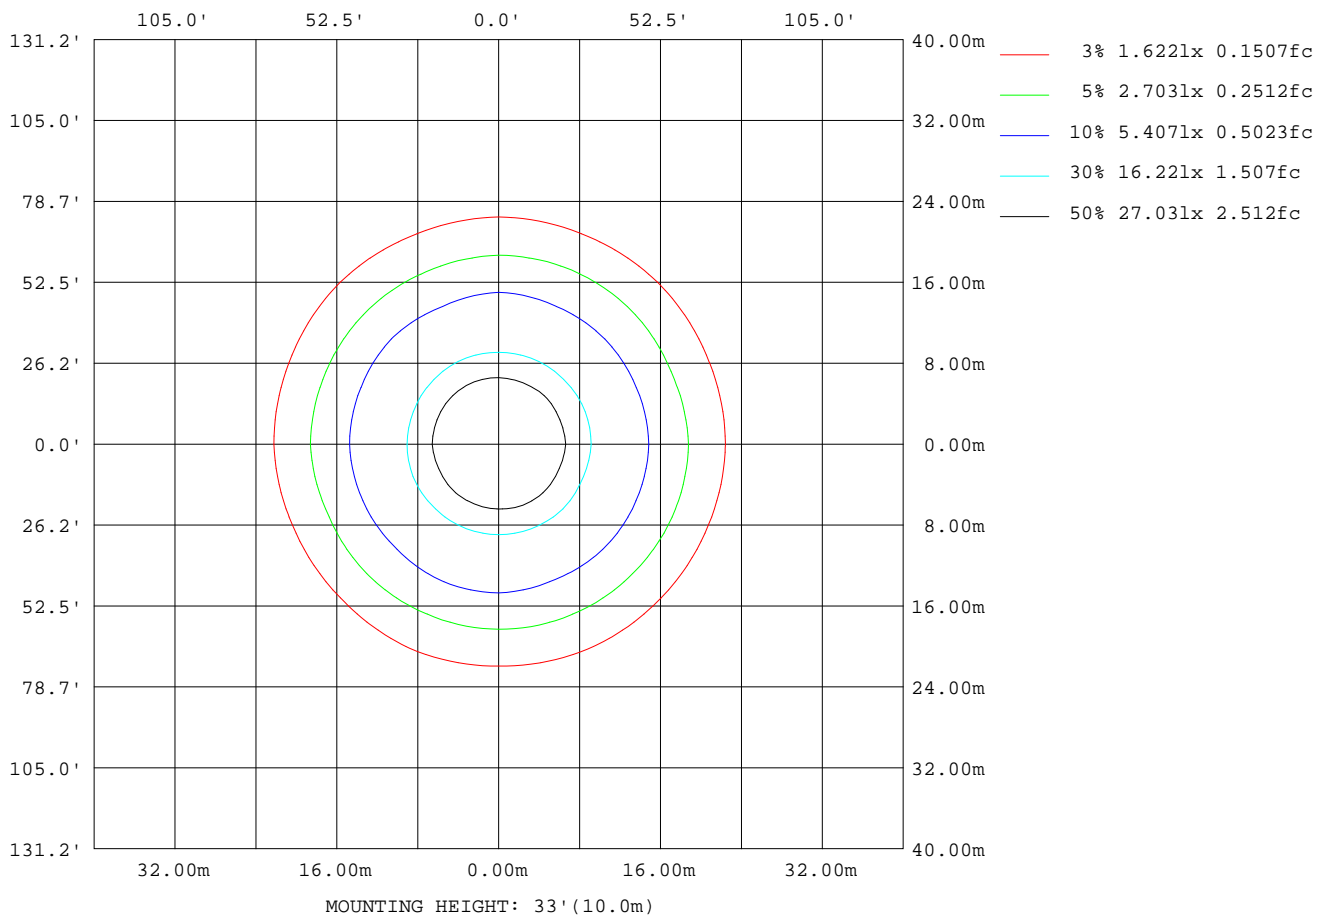

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:1936lx1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	150249
L_0~180(75)av	161352
L_0~180(85)av	273007
L_90~270(65)av	150189
L_90~270(75)av	154044
L_90~270(85)av	284819
L_45(65)av	150313
L_45(75)av	156761
L_45(85)av	280091

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

Planar Illuminance Curve

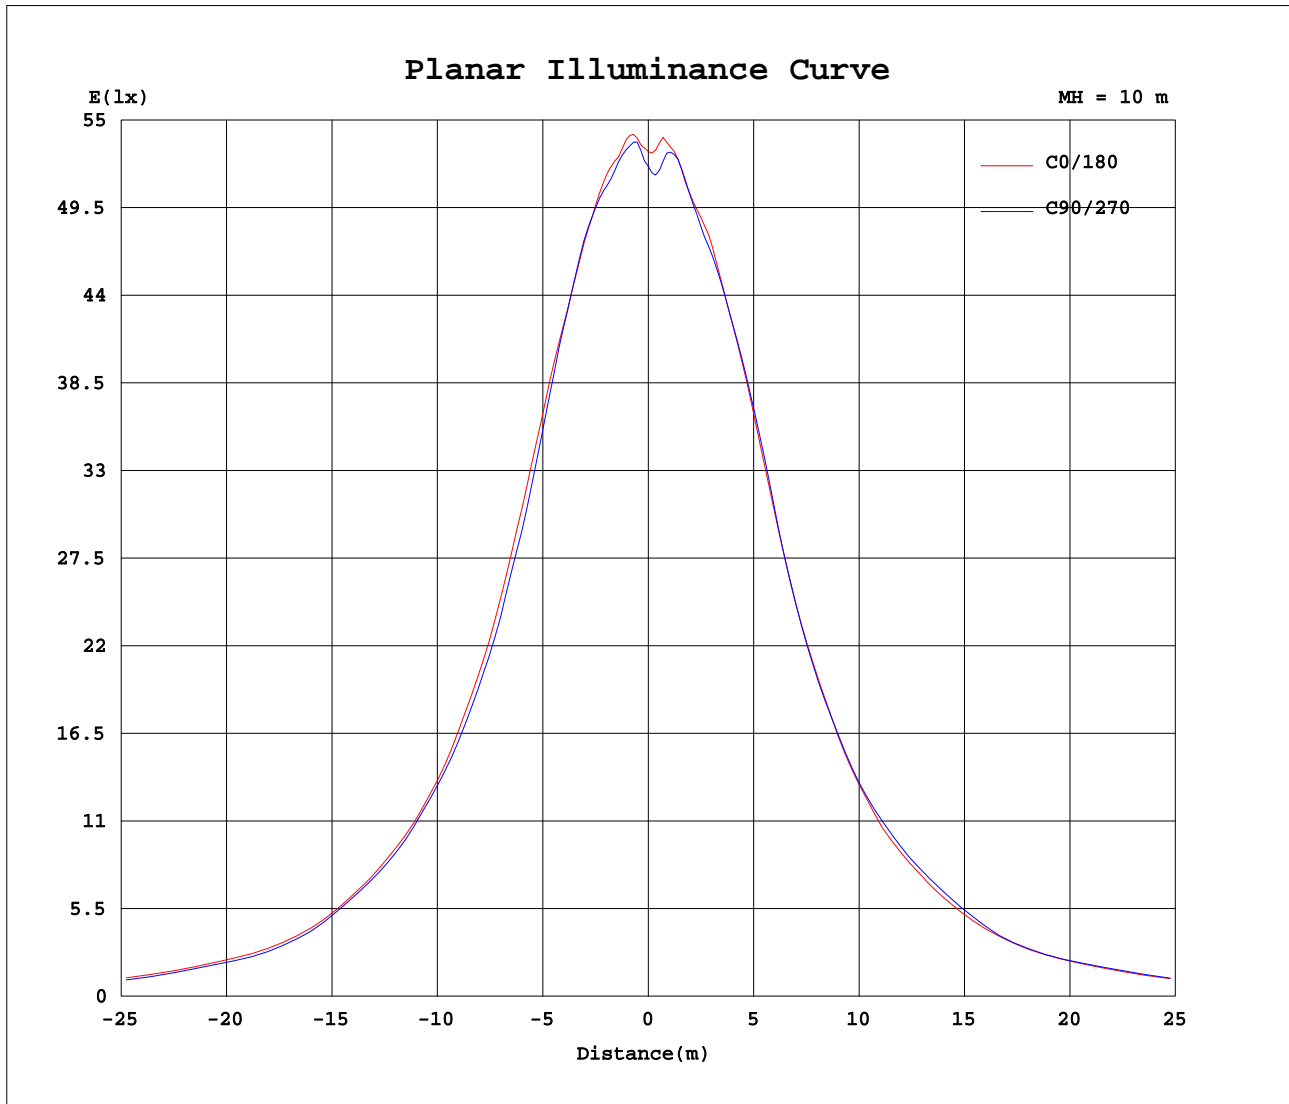

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 9.660m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.4V I:1.185A P:141.1W PF:0.9970 Lamp Flux:1936lx1 lm		
NAME: 花瓶灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.11*0.11*3.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	5224	5224	5224	5224	5224	5224	5224	5224	5224	5224	5224	5224	5224	5224	5224	5224			
5	5385	5396	5440	5431	5414	5410	5372	5384	5343	5329	5329	5324	5368	5410	5404	5443			
10	5373	5368	5378	5396	5388	5449	5412	5330	5268	5272	5268	5376	5378	5433	5416	5373			
15	5342	5404	5431	5463	5440	5495	5536	5339	5287	5308	5277	5295	5301	5377	5422	5325			
20	5241	5293	5374	5315	5336	5363	5417	5329	5224	5243	5351	5282	5311	5326	5346	5281			
25	5117	5136	5247	5050	5094	5096	5156	5101	5110	5081	5253	5172	5231	5185	5225	5186			
30	4840	4752	4846	4743	4711	4722	4794	4736	4814	4799	4961	4885	4956	4847	4950	4900			
35	4479	4312	4383	4473	4343	4351	4414	4417	4408	4441	4467	4555	4492	4485	4532	4485			
40	4134	3982	4061	4116	4040	4063	4099	4162	4090	4052	4096	4207	4133	4131	4194	4177			
45	3775	3750	3751	3606	3751	3699	3682	3738	3702	3694	3809	3750	3802	3835	3785	3886			
50	3495	3522	3534	3460	3440	3417	3328	3445	3388	3418	3521	3503	3591	3540	3478	3573			
55	3147	3097	3085	2987	3128	3107	2985	3059	3075	3104	3193	3124	3314	3181	3163	3162			
60	2675	2605	2581	2540	2569	2540	2563	2547	2632	2607	2633	2614	2706	2671	2691	2637			
65	2449	2408	2382	2355	2329	2351	2291	2305	2364	2375	2463	2411	2482	2459	2494	2474			
70	1990	1918	1862	1900	1777	1850	1871	1837	1942	1952	1931	1989	1946	1995	2010	1981			
75	1605	1524	1487	1520	1459	1524	1520	1489	1561	1536	1522	1621	1563	1627	1621	1593			
80	1182	1110	1092	1123	1071	1099	1110	1070	1156	1132	1156	1223	1202	1209	1221	1163			
85	908	906	918	888	908	881	883	902	896	910	934	940	974	958	966	964			
90	741	748	724	694	715	705	686	753	711	724	763	726	766	748	752	806			
95	590	604	607	570	600	582	566	641	575	609	620	605	651	646	607	673			
100	496	505	481	472	487	485	460	496	482	488	492	496	535	541	512	531			
105	390	403	368	396	354	393	384	366	387	381	385	397	392	418	413	408			
110	295	266	257	271	241	258	253	230	264	261	267	309	283	294	301	275			
115	218	217	218	209	205	210	206	210	210	208	212	219	218	228	227	222			
120	205	207	196	193	191	189	193	195	199	202	196	204	197	199	199	204			
125	167	157	152	154	148	151	157	148	150	152	157	159	166	152	163	162			
130	121	124	131	114	130	120	116	128	117	125	129	122	132	133	125	142			
135	103	103	102	104	99.1	105	104	98.8	98.9	97.8	105	99.7	109	107	106	102			
140	75.1	73.0	72.1	67.9	71.2	69.9	69.0	71.1	71.2	71.7	72.8	72.3	76.1	76.6	76.4	76.7			
145	52.7	52.1	51.9	51.9	49.7	53.3	51.6	50.9	49.7	50.4	51.1	48.7	51.0	51.5	51.4	50.2			
150	36.0	35.0	35.3	34.5	34.5	35.4	35.8	35.1	33.4	33.9	34.7	35.5	35.5	34.8	34.9	35.6			
155	32.3	32.2	32.6	32.5	32.7	32.1	32.6	32.7	30.9	31.0	31.0	31.3	31.3	31.4	31.6	30.9			
160	31.1	31.0	31.2	31.3	31.5	31.3	31.6	31.8	30.3	30.1	30.1	30.3	30.1	30.1	29.9	30.0			
165	30.8	31.2	31.1	31.4	31.3	31.7	31.7	32.1	30.8	30.6	30.6	30.3	30.4	30.2	30.2	30.1			
170	31.7	32.0	31.8	32.0	31.9	32.4	32.3	32.6	31.7	31.4	31.6	31.3	31.4	31.2	31.4	31.2			
175	32.6	32.7	32.5	32.6	32.6	33.1	33.0	33.2	32.8	32.4	32.5	32.4	32.6	32.3	32.5	32.5			
180	32.9	33.2	33.0	33.2	33.0	33.2	33.1	33.2	33.2	33.1	33.1	33.1	33.2	33.2	33.2	33.1			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks: